

Westminster In Ground Unit

Power up on demand

If you need on-demand power, our Westminster product is the ideal solution.

As an in ground retractable unit that comes with a variety of Single Phase Neutral (SPN) and Three Phase Neutral (TPN) socket arrangements, the Westminster comes in two standard sizes and sits flush to the surface when not in use.

From shopping centres to airports, markets to events, the Westminster can provide power wherever it's needed. It's also suitable for single or three phase DNOs.

Catflap versions available enabling operation when in the down position.



Specifications

The Westminster unit has a range of features that make it:

Adaptable

- 16A / 32A 240V socket arrangements available
 - 110*/230/400V A.C. variants
 - 50mm recess in covers can be finished with floor infill to blend in seamlessly
- *Transformer required

Safe and secure

- All components are fully earth bonded
- Electrical components sealed to IP67
- Individual socket RCBO protection
- Stainless steel anti-vermin construction
- Positive drainage to suit 100mm pipe

Easy to use

- Assisted lift on lids
- Fully operational in 60 seconds
- Cable entry plates for glands: incoming and outgoing cable (to tub)
- Catflap for use with trailing leads

Westminster In Ground Unit

Tailoring options

Customise your Westminster unit by adding any of the following options**:

- Data points
- A water connection
- Smart metering
- Automatic power disconnection when lid is down
- A stainless steel tread plate/stainless steel tub
- A 63A socket

**Options may impact lead times.

Construction

Every Westminster unit has..

- A 5mm / 10mm galvanised steel body
- A long-life stainless steel wedge lock and hinges
- A hinged stainless steel lock cover
- An IP67 socket box
- Bolted panels for easy replacement

Meeting standards

The unit adheres to the following standards:

- BS EN ISO 1461 (Hot dipped galvanised)
- IP67 accordance to IEC60529
- Designed and manufactured in accordance with quality management system ISO9001:2008

Additional information


- The 4-way Westminster weighs approx. 150kg
- The 5-way Westminster weighs approx. 180kg

Configuration Table

Outlets	Configuration	Standard Part No.	With Catflap
2x	2 x 16A	F8000	F8200
	2 x 32A	F8001	F8201
	1 x 16A / 1 x 32A	F8002	F8202
3x	3 x 16A	F8010	F8210
	2 x 16A / 1 x 32A	F8011	F8211
	1 x 16A / 2 x 32A	F8012	F8212
	3 x 32A	F8013	F8213
4x	4 x 16A	F8020	F8220
	3 x 16A / 1 x 32A	F8021	F8221
	2 x 16A / 2 x 32A	F8022	F8222
	1 x 16A / 3 x 32A	F8023	F8223
5x	4 x 16A / 1 x 32A	F8030	F8230
	5 x 16A	F8031	F8231

Dimensions

Size (mm)	Outgoing ways	
	2-4	5
Length	905	1035
Width	518	518
Tub depth	475	175
Raised height (H)	590	720
Raised width (W)	275	275

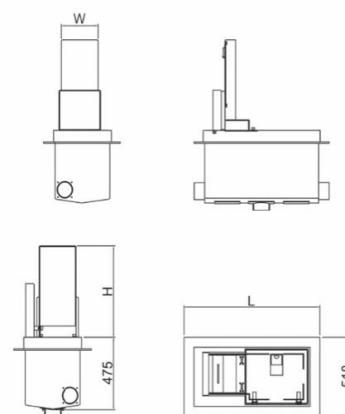

Please contact our sales office for further details



Lucy Zodion Ltd,
Station Road,
Sowerby Bridge,
HX6 3AF, United Kingdom

Tel +44 (0)1422 317337
Fax +44 (0)1422 836717
sales@lucyzodion.com
www.lucyzodion.com